



FLOOR

INVOKE™
COLORBODY™ PORCELAIN

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Sheer Glow 12 x 24 field tile in a grid pattern on the floor. Backsplash features Color Wave™ Casual Tan 3 x 6 field tile and Downtown Oasis 1 x 1 blend. Above photo features Copper Haze 12 x 24 field tile in a grid pattern on the floor.

The Look of Cool Cement Can Modernize Almost any Space

The look of cool cement can modernize almost any space. Invoke™ by Daltile gives a concrete feel with gorgeous porcelain tile. Available in large sizes for robust spaces and industrial colors to complement your palette, this collection is meant to invoke a modern mood. Perfect for high-traffic areas not wanting to sacrifice style, Invoke is durable, sleek and exudes modern appeal.

- MODERN LOOK
 - With cool undertones and a subtle shine, these earthy colors can modernize any space
 - Create the sleek, modern look of stained concrete
- UNDULATED SURFACE
 - Accentuates the unique concrete visual with stylized surface effect
 - Subtle surface shimmer adds dimension, showcasing highlights and lowlights in the tile



PRE-CONSUMER
RECYCLED MATERIALS



TRU-EDGE

CERTIFIED
PORCELAIN
TILE
© 8% OF SOLID WATER RESISTANT


FIELD TILE




SHEER GLOW ID01



MYSTIC WAY ID02

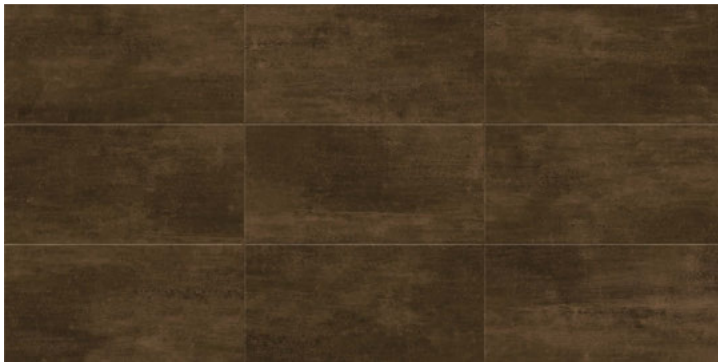

COPPER HAZE ID03

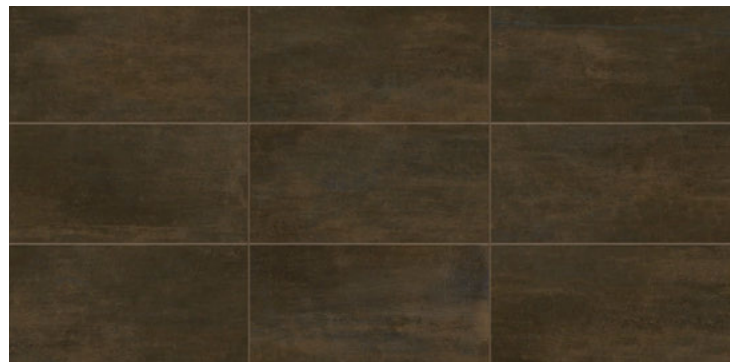






EVENING VEIL ID04

INVOKE™

COLORBODY™ PORCELAIN

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	18 x 36 Field Tile	(17-1/2" x 35-1/8") (44.50 cm x 89.32 cm)	3/8"	17.40	4
	24 x 24 Field Tile	(23-7/16" x 23-7/16") (59.44 cm x 59.44 cm)	3/8"	15.28	4
	18 x 18 Field Tile	(17-1/2" x 17-1/2") (44.50 cm x 44.50 cm)	3/8"	17.36	8
	12 x 24 Field Tile	(11-5/8" x 23-7/16") (29.56 cm x 59.44 cm)	3/8"	15.28	8
	6 x 24 Field Tile	(5-3/4" x 23-7/16") (14.62 cm x 59.44 cm)	3/8"	10.67	11

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.




OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

APPLICATION NOTES:


Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

TRIM

	Type	Number	Size	Pieces per Carton
	Bullnose	S-44H9	4 x 18	10
	Cove Base	S-36C9TB	6 x 12	20
	Cove Base Outcorner	SC-36C9TB	1 x 6	10

Bullnose, cove base, and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when installed in a staggered brick-joint pattern; overlap should not exceed 33%)	 High (V3)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 275 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DAL TILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (8/16)