



FLOOR | WALL

BRICKWORK™

PAVER TILE with REVEAL IMAGING®

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover photo features Studio 4 x 8 in a brick-joint pattern on the wall and Yorkwood Manor™ Birchtree on the floor. Above photo features Terrace 2 x 8 field tile in a brick-joint pattern on the wall and Season Wood™ Redwood Grove on the floor.

Create Your Own Urban Revival

Renew your space with the dramatic look of Brickwork™. This modern twist on trend favorite uses random shade variation and distressed edges to emulate brick traditionally found in historic metropolitan architecture and design. Brickwork is ideal for adding warmth, texture and a historic feel to a room. With its size options and diverse color palette, Brickwork is the ideal product to add an urban touch to your space.

- URBAN VISUAL
 - Shade variation, distressed edges and weathering texture emulate the look of antique brick
 - Adds warm, historic feel to rooms
 - Visual reminiscent of exposed brick commonly found in urban architecture
- HISTORIC OPTIONS
 - Two sizes available that can be used together to create authentic designs
 - Offered in six colors to complement multiple design styles



PRE-CONSUMER RECYCLED MATERIALS




MADE IN THE U.S.A.




REVEAL IMAGING®

All or select items within this series are made in the USA. For more information, visit daltile.com/Brickwork.


2 x 8 FIELD TILE

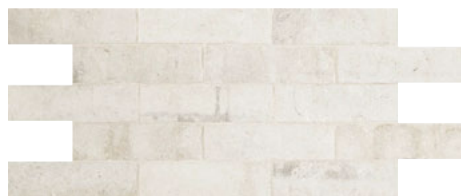

STUDIO BW01

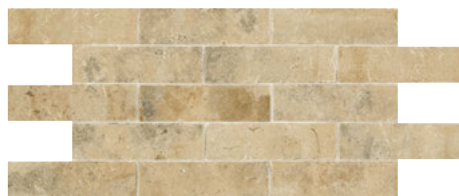

ATRIUM BW02

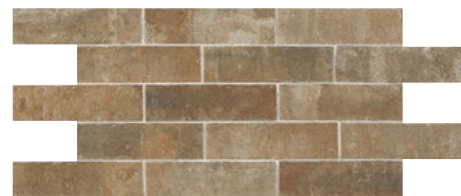

PATIO BW03



ALCOVE BW04




TERRACE BW05



CORRIDOR BW06

4 x 8 FIELD TILE

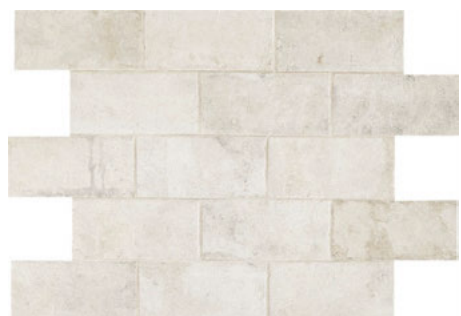


STUDIO BW01



ATRIUM BW02



PATIO BW03

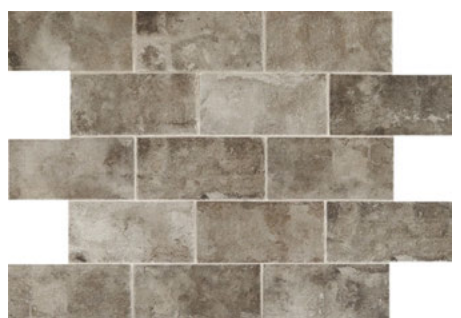

ALCOVE BW04



TERRACE BW05





CORRIDOR BW06

BRICKWORK™

PAVER TILE with REVEAL IMAGING®

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	4 x 8 Field Tile	(3-7/8" x 8") (9.80 cm x 20.30 cm)	7/16"	7.92	36
	2 x 8 Field Tile	(2-1/4" x 8") (5.70 cm x 20.30 cm)	7/16"	6.24	48

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the new standard for tiles specified for commercial application in standard A137.1–2012, Section 9.6. It replaces the SCOF value of ≥ 0.60 referenced in ASTM C1028. For more information on the correlation between the two values and about the DCOF AcuTest™, visit www.daltile.com/dcof.


OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	✓

APPLICATION NOTES:

Suitable for exterior wall applications in freezing and non-freezing climates when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/8"	 Random (V4)

TEST RESULTS

	ASTM#	Result
Water Absorption	C373	< 3.0%
Breaking Strength	C648	> 400 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DALTILE.COM



7834 C. F. Hawn Freeway, Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (3/16)