



WALL

AMITY™

GLASS WALL & MOSAIC

 **daltile®**
IMAGINE WHAT'S POSSIBLE™



Cover and above photos feature Amity™ Grey random linear mosaic on the wall.

Elevate With Inviting Accents

Come home to effortless design with the sleek glass wall tile and mosaic collection, Amity™. Offered in two modern shapes, Amity is a clean-lined choice for backsplashes and decorative accents. While giving a nod to a vintage aesthetic, Amity brings a contemporary update to your home with monochromatic colors in an inviting neutral palette.

- DÉCOR OPPORTUNITY
 - Featured in five monochromatic colors
 - Available in a 3 x 6 glass wall tile and a glass random linear mosaic
- MODERN UPDATES
 - Crafted from smooth, sheen glass
 - A neutral backdrop for surrounding décor

USAGE

Floors

Walls

Countertops



W




3 x 6 4MM GLASS WALL TILE*



WHITE AM50



TAUPE AM51

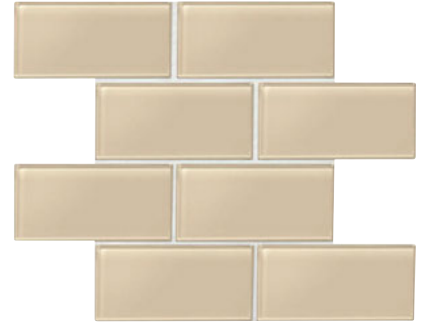

BEIGE AM53



GREY AM52



BROWN AM54

* 3 x 6 wall tile sold individually by the piece.

4MM RANDOM LINEAR MOSAIC



WHITE AM50



TAUPE AM51



BEIGE AM53





GREY AM52



BROWN AM54

SIZES

			Thickness	Sq. Ft./ Carton	Pieces/ Carton
	3 x 6 Wall Tile	(2-7/8" x 5-13/16") (7.28 cm x 14.75 cm)	3/16"	6.00	50
	Random Linear Mosaic (Mesh-mounted)	(11-7/16" x 13-7/8") (29.03 cm x 35.23 cm)	3/16"	13.95	15

APPLICATIONS


	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	
Wet & Level – Interior Floor	≥ 0.42	
Shower Floors (Residential or Light Commercial)	≥ 0.42	
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	
Pool Linings	N/A	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltille.com/DCOF.

APPLICATION NOTES:

Wall tile and mosaic suitable for interior applications only.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" Approximately	 Low (V1)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 100 lbs
Scratch Hardness	MOHS	4.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For additional information on test results, visit us at: daltille.com/information/TestResults.

NOTES

For additional information refer to "Factors to Consider" at: daltille.com/Factors.

Since there are variations in all glass products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.2 standards.

Use of a white latex modified thin-set is recommended for installation.



DESIGNED TO HELP EARN LEED™
CREDITS. For more detailed information,
visit daltillegreenworks.com.



SCAN QR CODE
FOR PRODUCT
INFORMATION

Get a QR Code
reader at:
GET.DALTILE.COM



7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of
Daltille® products and information,
visit our website at daltille.com.



IMAGINE WHAT'S POSSIBLE™

©2017 Daltille (4/17)