


FLOOR

PLAZA NOVA™

COLORBODY™ PORCELAIN

 **daltile**®
IMAGINE WHAT'S POSSIBLE™


FIELD TILE

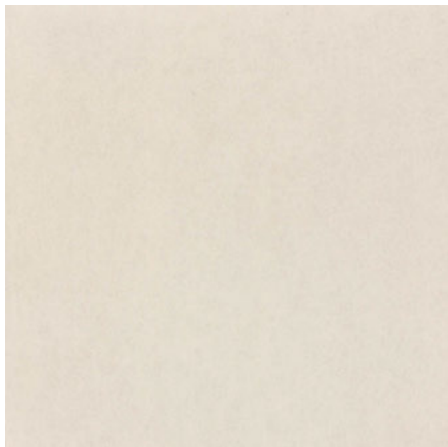

WHITE IMAGE PN94




BEIGE HAZE PN95

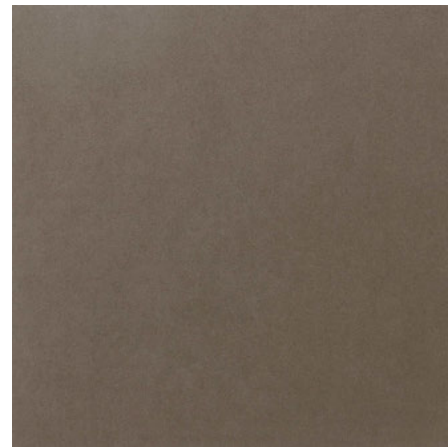


GREEN MIST PN97



GRAY FOG PN98

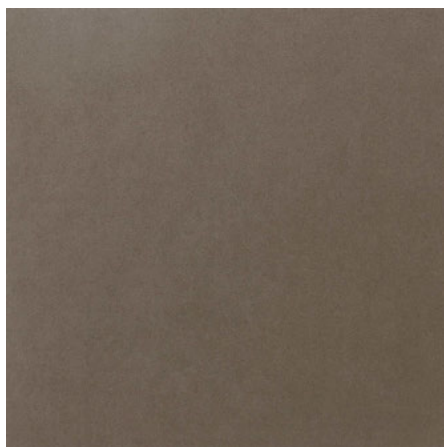

BROWN VISION PN96

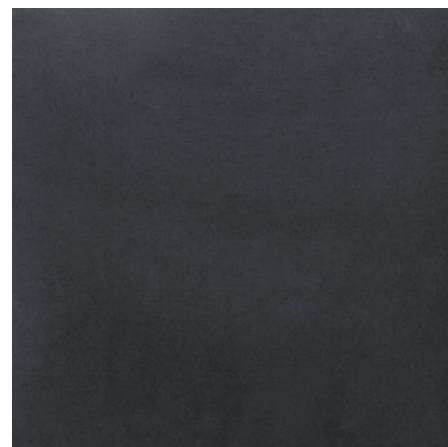



BLACK SHADOW PN99

Elevate Your Space with the Contemporary Design of Plaza Nova



Plaza Nova is a cement look that's ideal for any modern design. This contemporary tile is offered in six neutral colors. Plaza Nova is available in two sizes and sure to please with its sleek, stylish look.

- **SOPHISTICATED STYLE**
 - Emulates the modern look of cement
 - Sleek design ideal for contemporary decors
- **CULTIVATED DESIGN**
 - Broad color palette includes both cool and warm tones
 - Offered in two modular sizes


 **LINEAR OPTIONS**
 **TRU-EDGE**

 **CERTIFIED PORCELAIN™**
TILE
0.5% or less water absorption

SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	12 x 24 Field Tile	(11-13/16" x 23-5/8") (30.00 cm x 60.00 cm)	3/8"	9.68	5
	12 x 12 Field Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	3/8"	10.65	11

LINEAR OPTIONS™ SIZES

			Thickness	Sq. Ft. per Carton	Pieces per Carton
	6 x 24 Field Tile	(6" x 23-5/8") (14.63 cm x 60.00 cm)	3/8"	10.65	11
	4 x 24 Field Tile	(4" x 23-5/8") (9.73 cm x 60.00 cm)	3/8"	6.46	10
	2 x 24 Field Tile	(2" x 23-5/8") (4.67 cm x 60.00 cm)	3/8"	6.66	20

Additional linear and rectangular sizes are also available..

FLOOR APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior	N/A	✓
Wet & Level – Interior	≥ 0.42	✓
Exterior Applications; Pool Decking & Other Wet Areas with Minimal Footwear	≥ 0.60	
Ramps & Inclines	≥ 0.65	

A DCOF value of ≥ 0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-2012, Section 9.6. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.




OTHER APPLICATIONS

	Suitable
Walls/Backsplashes	✓
Countertops	✓
Pool Linings	

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.


TRIM

	Type	Number	Size	Pieces per Carton
	Bullnose	S-43C9	3 x 12	30
	Cove Base*	P-36C9T	6 x 12	22
	Cove Base* Outcorner	PC-36C9T	1 x 6	15

* Cove base and cove base outcorner are clay body ceramic and are suitable for applications in non-freezing climates only.

Bullnose, cove base, and cove base corner trim are intended to coordinate with floor field tile in the standard 90-degree installation position.

INSTALLATION

Grout Joint Recommendation	Shade Variation
1/8" (3/16" when multiple sizes are installed in a modular pattern and/or when tile with a length 15" or greater is installed in a staggered brick-joint pattern. Overlap should not exceed 33%)	 Medium (V2)

TEST RESULTS

	ASTM#	Floor
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 400 lbs.
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant

NOTES

Special consideration needs to be given when installing tiles greater than 15 inches. Please refer to daltile.com/LargeTiles for more information.

Special care should be taken when grouting with dark pigmented colors. A grout release is recommended to prevent finely powdered pigments from lodging in the pores of the surface. Use of a latex modified thin-set is recommended for installation.

Since there are variations in all fired ceramic products, tile and trim supplied for your particular installation may not match these samples. Final color selection should be made from actual tiles and trim and not from tile samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Not for use on ramps.

For additional information refer to "Factors to Consider" at daltile.com/Factors.



DESIGNED TO HELP EARN LEED™ CREDITS. For more detailed information, visit daltilegreenworks.com.



SCAN QR CODE FOR PRODUCT INFORMATION

Get a QR Code reader at: GET.DAL TILE.COM



7834 C. F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at daltile.com.



IMAGINE WHAT'S POSSIBLE™

©2016 Dal-Tile Corporation (7/16)